Unmarked tolerances shall be implemented in accordance with ISO 2768-mk.				
1-6 ±0.1	>6-30 ±0.2	>30-120 ±0.3	>120-400 ±0.5	>400-1000 ±0.8

REVISION HISTORY				
REV	DESCRIPTION	DWG CHECK	APPR BY	APPR DATE

A-A

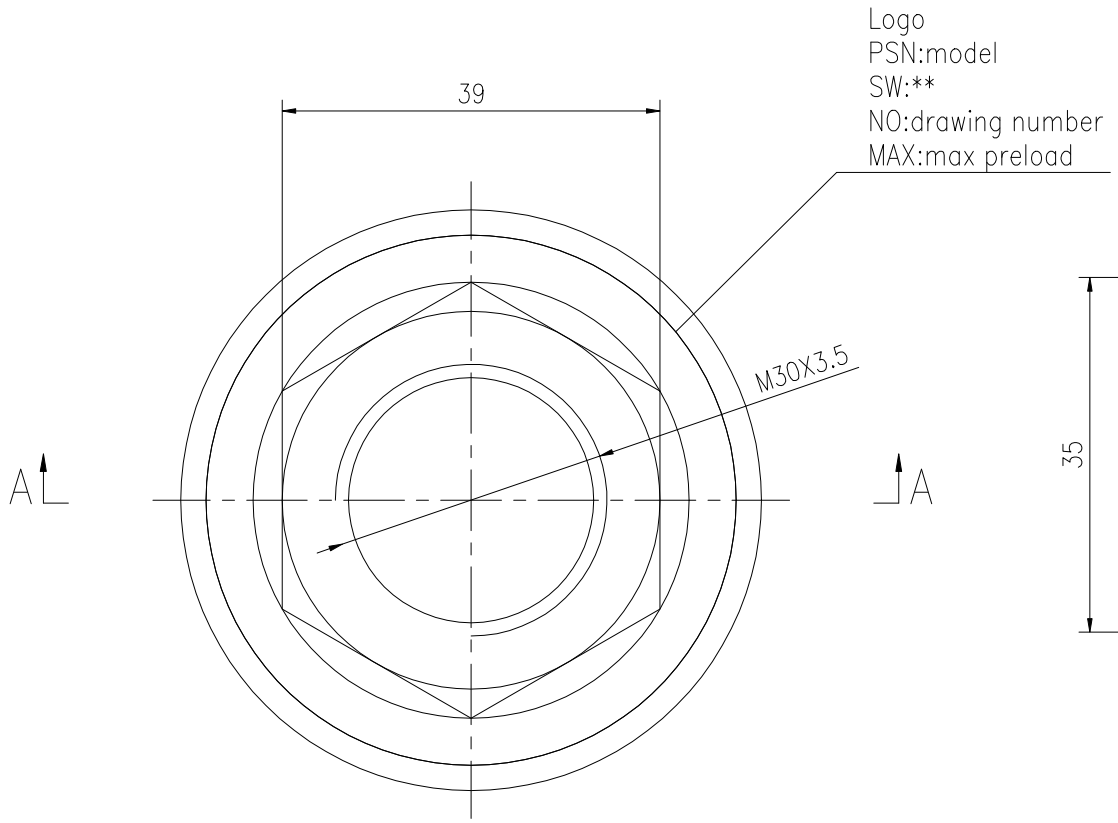

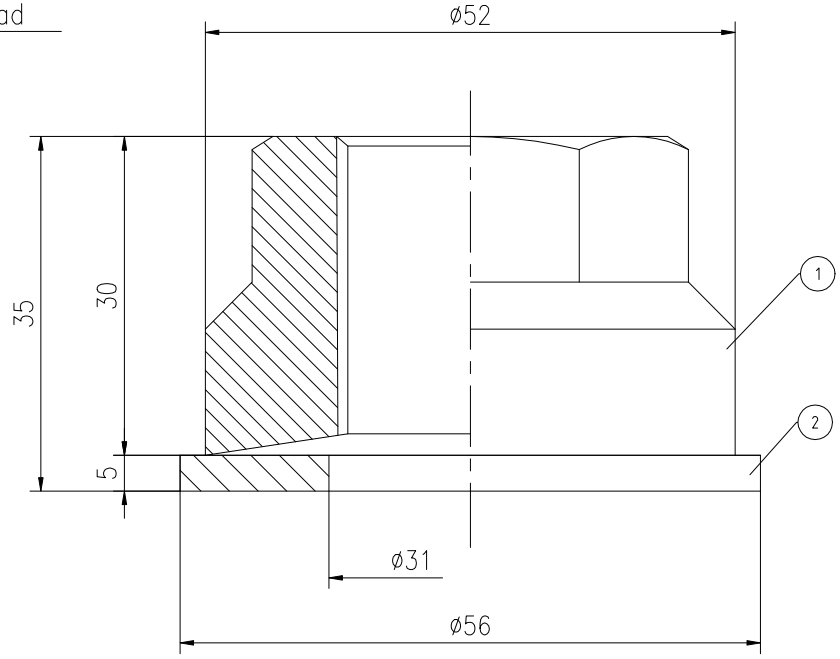

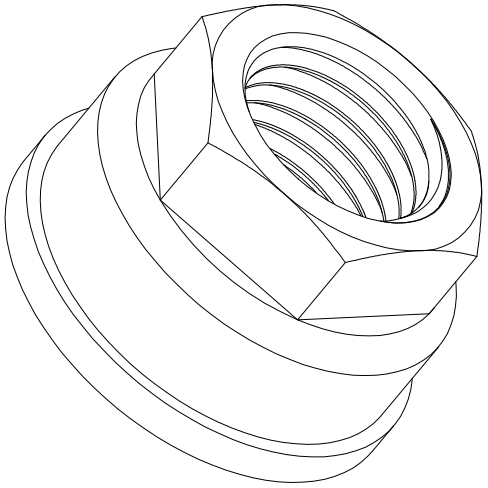

PARTS LIST					
PART	DWG NO.	QTY	DESCRIPTION	MATERIAL	WEIGHT(kg)
1	FN303.51H-1	1	Nut M30X3.5	CrNiMo	0.18
2	FN303.51H-3	1	Gasket 56X31X5	CrNiMo	0.07

During on-site installation, please adjust the torque in conjunction with the bolt stretching distance. Without our authorization, the drawings shall not be shared with any third party, and we reserve theright to pursue legal liability against those who disclose the drawings to external parties.

上海康普曼传动机械有限公司
KPM Power Transmission (Shanghai) Co.,Ltd
+86 021-61301856
Liang.Guo@kpmdrive.com.cn

MAX PRELOAD CAPACITY	427 KN	DESIGNED:	DAYE: 2025.12.01	FNH-30X3.5	WEIGHT: 0.25kg
LUBRICANT	G-N PLUS	REVIEWED:	DAYE: 2025.12.01		STATE: PRELIMONARY APPROVED
TEMPERATURE RATING	-25℃~250℃	DRAWN:	DAYE:	DWG NO: FN303.51H	SHEET: 1:1

DWG NO: FN303.51H

SHEET: 1:1